


ковровая плитка • ковровые покрытия • ковры и ковровые дорожки • гобеленовые настенные ковры
безопасный пол • грязезащита • аксессуары для лестниц и пола • системы светодиодной подсветки
низкопрофильная система кабельной проводки • сопутствующие товары

СОВРЕМЕННЫЕ НАПОЛЬНЫЕ ПОКРЫТИЯ (ООО «СНП»)

Телефон +7 (495) 916-94-83

E-mail info@s-n-p.ru

Сайт <http://www.s-n-p.ru>

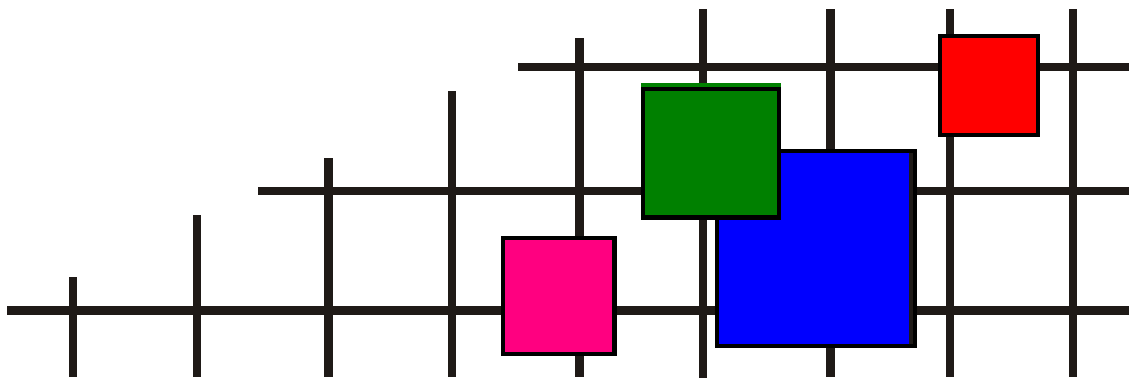

СЕРВИС ВЫСОКОГО КАЧЕСТВА!


Assur - Nippour



346631 Tadmar



346632 Arbela

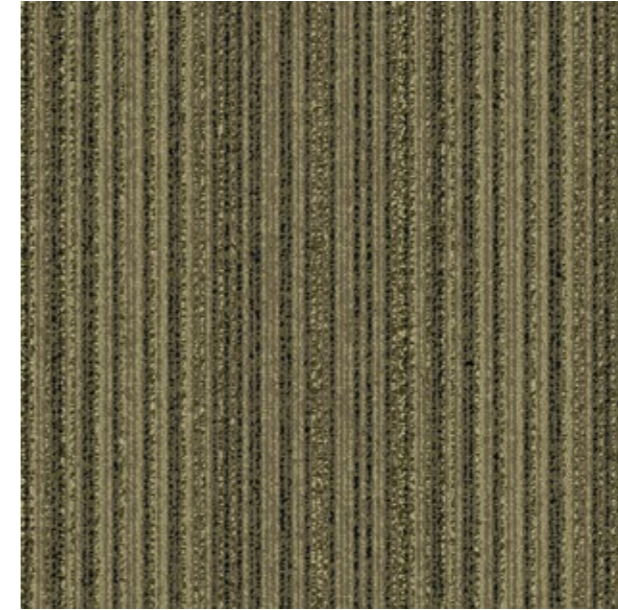

346633 Haran



346634 Tarsus



346635 Arvad



346636 Gozan

Assur - Nippur




346635 Arvad

Installed: Non Directional



346632 Arbela, 346633 Haran & 346634 Tarsus

Installed: Non Directional

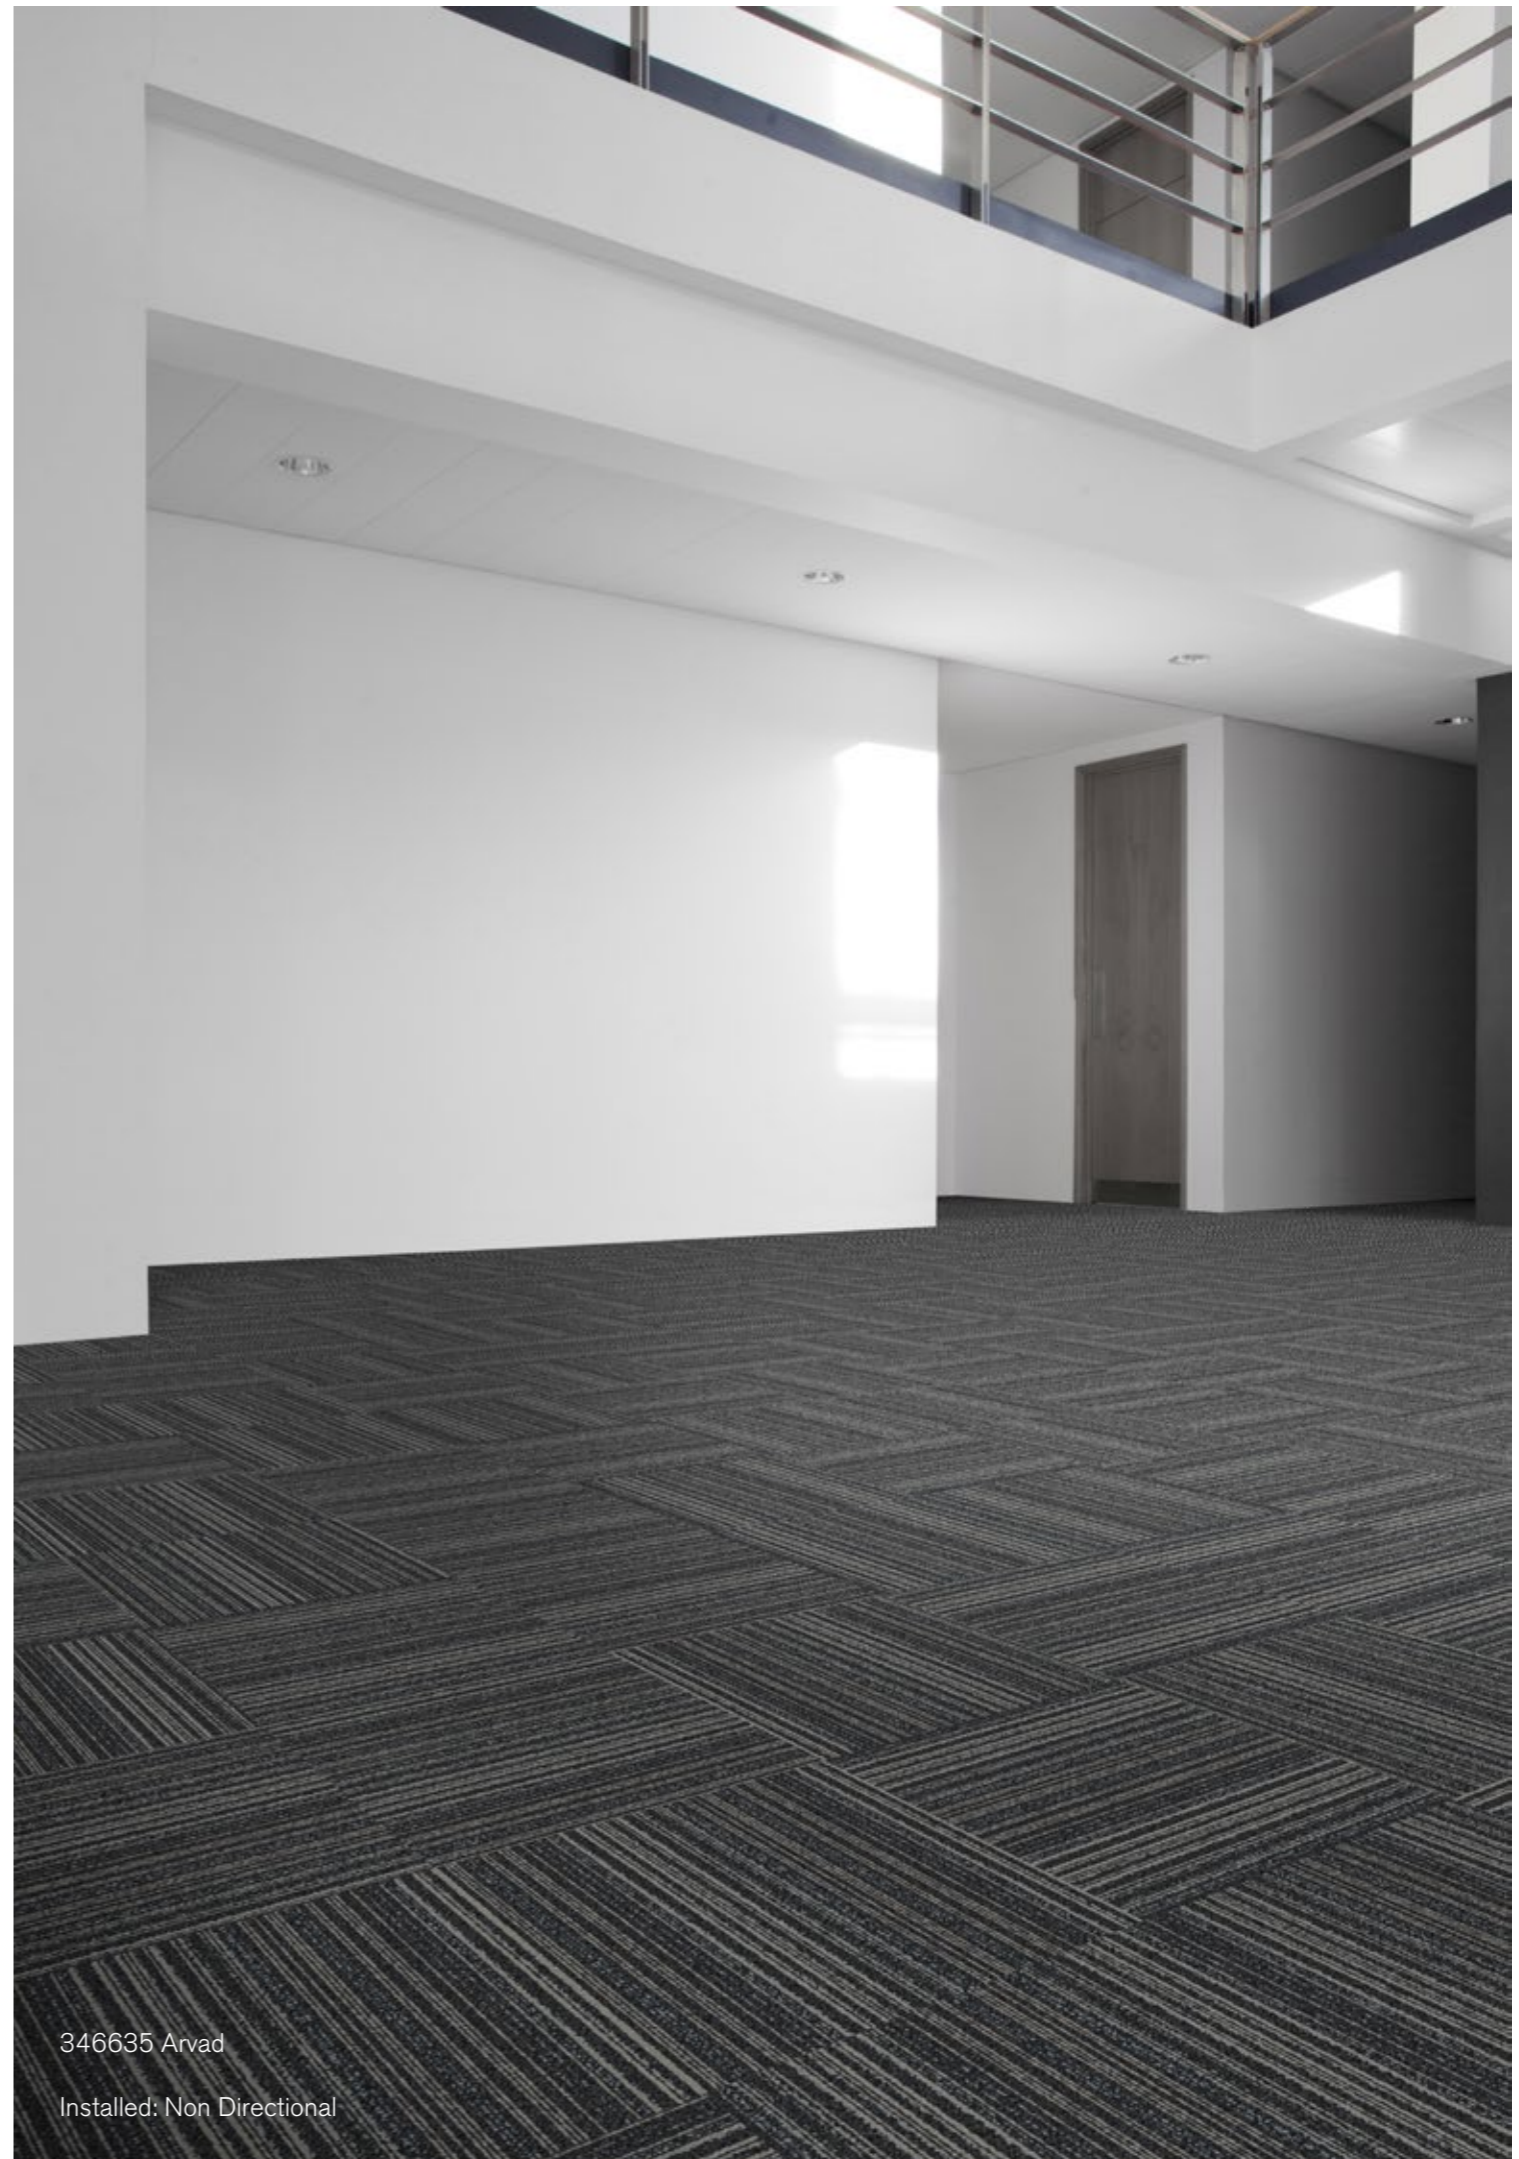

346635 Arvad

Installed: Non Directional

| | |
|---------------------------|---|
| Product Definition | Tufted Patterned Level Loop Tile |
| Konstruktion | Tuftgemusterte Schlingenqualität |
| Descripción | Moqueta modular tufting bucle con diseño |
| Description | Dalle de moquette à velours tufté bouclé à motifs |
| Type | Getufte gedessineerde bouclé |
| Descrizione | Bouclé tufted |


| | |
|----------------------|--|
| Pile Material | 100% BCF Solution Dyed Nylon contains preconsumer recycled content |
| Polfasermaterial | 100% Polyamid garngefärbt mit recyceltem Anteil (Prä-Konsumenten- Anteil) |
| Composición Fibra | 100% Poliamida BCF tintada en masa con contenido reciclado preconsumo |
| Composition | 100% Polyamide BCF Teint en masse contenant des éléments recyclés pré et post-consommation |
| Poolmateriaal | 100% Solution Dyed Polyamide BCF, bevat preconsumer gerecycled content |
| Fibra | 100% Poliammide BCF tinta in massa con contenuto riciclato preconsumer |

| | |
|--|--|
| Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinsetgewicht / Peso Felpa | 596g/m ² ± 5% |
| Total Weight / Gesamtgewicht / Peso Total Poids total / Totaalgewicht / Peso Totale | 4494g/m ² ± 5% |
| Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa | 3,0 mm ± 0,3 mm |
| Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale | 7,0 mm ± 0,5 mm |
| Gauge/Ends 10 cm / Teilung x 10 cm / Galga x 10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm | 1/10 – 39,4 |
| Tufts per m² / Noppenzahl/m ² / Puntadas m ² / Densité du tuft par m ² / Aantal noppen per m ² / Densità Punti | 177,300 ± 5% |
| Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo | Graphlex® |
| Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura | Heavy Contract (EN 1307) Class 33 / LC2 |

| | |
|---|-------|
| Style | 34663 |
| 4m ² - 16 tiles per box (50 x 50 cm ± 0,15%) | |

| | |
|---|--|
| Radiant Panel / Schwerentflammbarkeit | (EN ISO 9239/1) Euroclass Cfl s1 (EN ISO 13501) |
| Hot Metal Nut | Pass, low radius of effects of ignition (BS 4790) |
| Dimensional Stability / Dimensionsstabilität / Estabilidad Dimensional / Stabilité dimensionnelle / Dimensionele stabiliteit / Test Stabilità dimensionale | ≤ 0,2% (ISO 2551/EN 986) |

| | | | | | |
|-------------------------|--------------|--------------|---------------|---------------|---------------|
| Sound Absorption | | | | | |
| 125Hz | 250Hz | 500Hz | 1000Hz | 2000Hz | 4000Hz |
| 0.00 | 0.03 | 0.07 | 0.21 | 0.30 | 0.38 |

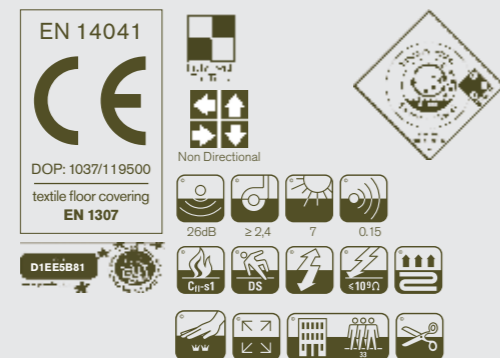

Light Value

| Product | Colour No | Colour Name | L Value* | Y Value* |
|-----------------------|-----------|-------------|----------|----------|
| Assur - Nippur | 346631 | Tadmar | 48,72 | 17,37 |
| | 346632 | Arbela | 38,4 | 10,31 |
| | 346633 | Haran | 41,03 | 11,88 |
| | 346634 | Tarsus | 30,28 | 6,35 |
| | 346635 | Arvad | 30,89 | 6,6 |
| | 346636 | Gozan | 27,42 | 5,24 |

* **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493
Lichtreflexionswert: L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

Valores de Reflectancia de Luz: Valor L = L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

Valeurs concernant la lumière: Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

Licht waarden: L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

Indici di riflettanza alla luce: Indice L = L secondo CIE L*a*b* colour space, Indice Y = Indice di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

| Construction | | | |
|--|---|---|---------------|
| Yarn system | 100% BCF Solution Dyed PA 6,6 | | |
| Backing system | Graphlex® | | |
| Recycled Content | Total Recycled Content | Pre consumer | Post consumer |
| Product average | 51,08% | 50,92% | 0,16% |
| Yarn | 19,98% | 18,73% | 1,25% |
| Recycled content can be subject to differences between colours. See details for individual colours on next page. | | | |
| Carbon Footprint | | | |
| Global Warming Potential (kgs CO2 equivalents/sq meter) | | | |
| Full life-cycle carbon footprint (following our EPD results or EPD calculation method) | Raw materials and Production: | 8.3 kg CO ₂ eq./m ² | |
| | Delivery and installation: | 0.32 kg CO ₂ eq./m ² | |
| | Use (10 years): | 2 kg CO ₂ eq./m ² | |
| | End of life (waste to energy): | 4.6 kg CO ₂ eq./m ² | |
| | TOTAL (10 years' lifetime): | 15.22 kg CO ₂ eq./m ² | |
| CO ₂ compensation | Carbon neutral Cool Carpet® is standard | | |
| Manufacturing | | | |
| Location | Scherpenzeel, NL Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990 | | |
| Installation Impacts | | | |
| TacTiles™ | Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs | | |
| Installation Waste | In a typical installation* using the installation method below: | | |
| | Non-directional – 1-2% installation waste | | |
| | For reference: 2 metre wide broadloom typically generates 7-10 % installation waste | | |
| * In a rectangular building, installed before walls. | | | |
| End-of-life | | | |
| Alternatives to landfill | Reuse: Can be cleaned and reused in a non-critical location to extend its useful life Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles Waste-to-Energy: Can be incinerated in appropriate waste to energy plant | | |
| Indoor Air Quality | | | |
| GUT (Gemeinschaft umweltfreundlicher Teppichboden) | The product passes all requirements of GUT's testing criteria regarding hazardous substances, emissions and odour. GUT PRODIS Certificate no. D1EE5B81 | | |
| CRI (Carpet & Rug Institute) | Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus) | | |
| Compliance to Green Building Schemes | | | |
| See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB) | | | |
| Type III Environmental Product Declaration | | | |
| EPD according to ISO 14025 | This product has a type III Environmental Product Declaration, EPD-IFF-2011711-E | | |

Recycled content – colour level

| Colourway | Total recycled content % | Pre-consumer recycled content | Post-consumer recycled content | Yarn recycled content | Pre-consumer yarn recycled content | Post-consumer yarn recycled content |
|---------------|--------------------------|-------------------------------|--------------------------------|-----------------------|------------------------------------|-------------------------------------|
| 346631 Tadmar | 50,27% | 50,04% | 0,22% | 19,28% | 17,58% | 1,70% |
| 346632 Arbela | 51,36% | 51,36% | 0,00% | 20,98% | 20,98% | 0,00% |
| 346633 Haran | 51,29% | 51,29% | 0,00% | 20,43% | 20,43% | 0,00% |
| 346634 Tarsus | 51,43% | 51,43% | 0,00% | 21,53% | 21,53% | 0,00% |
| 346635 Arvad | 50,90% | 50,36% | 0,54% | 17,52% | 13,42% | 4,10% |
| 346636 Gozan | 51,25% | 51,03% | 0,22% | 20,14% | 18,44% | 1,70% |

Compliance to Green Building Schemes


| | |
|-------------------------------|--|
| BREEAM (UK and international) | BRE Green Guide Ratings: Office - Not available Education - Not available Health Care - Not available Retail (by fashion) - Not available Potential contribution to following categories and credits: Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness Wst 01 - Construction Waste Management |
| LEED 2009 US | Potential direct or indirect contribution to following categories and credits: Indoor Environmental Quality Credit 4.1 Low Emitting Materials: Adhesive & Sealants Credit 4.3 Low Emitting Materials: Carpet Systems Materials and Resources Credit 2.1 Construction Waste Management Credit 4.1 Recycled content Credit 5.1 Regional Materials Innovation and Design Credits 1-4 1 Climate Neutral Products Credits 1-4 1 Pilot Credit 43, Certified Products |
| HQE (FR) | Potential direct or indirect contribution to several points within following targets: 2. Integrated choice of products and construction materials 3. Low site nuisance 9. Acoustic comfort 10. Visual comfort 11. No unpleasant smells 12. Sanitary quality of areas 13. Sanitary air quality |
| DGNB (D) | Potential direct or indirect contribution to following criterion ENVIRONMENTAL QUALITY ENV1.2 Local Environmental Impact ECONOMIC QUALITY ECO1.1 Building-Related Lifecycle Costs ECO2.1 Efficient Use of Space SOCIOCULTURAL AND FUNCTIONAL QUALITY SOC1.2 Indoor Air Quality SOC1.3 Acoustic Comfort TECHNICAL QUALITY TEC1.5 Ease of Cleaning and Maintenance TEC1.6 Ease of Dismantling and Recycling |

THIS DATA CAN BE USED TO COMPARE CARPET PRODUCTS WITHIN THE INTERFACE PORTFOLIO. COMPARISON WITH OTHER PRODUCTS WOULD REQUIRE USE OF SAME METHODOLOGIES. Interface reserves the right to change or modify any information included on the Environmental Data Sheet. Information updated 14th February 2019.



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want

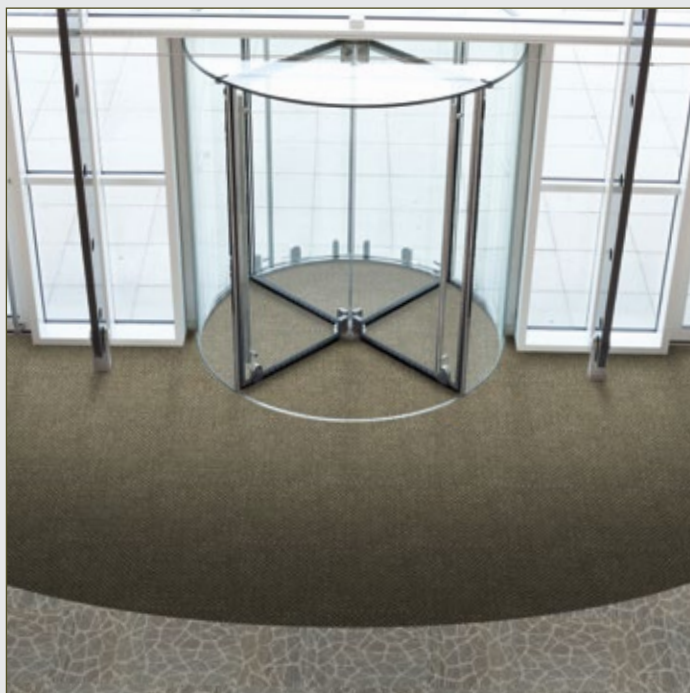

Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.