


ковровая плитка • ковровые покрытия • ковры и ковровые дорожки • гобеленовые настенные ковры  
безопасный пол • грязезащита • аксессуары для лестниц и пола • системы светодиодной подсветки  
низкопрофильная система кабельной проводки • сопутствующие товары

# СОВРЕМЕННЫЕ НАПОЛЬНЫЕ ПОКРЫТИЯ (ООО «СНП»)

**Телефон** +7 (495) 916-94-83

**E-mail** info@s-n-p.ru

**Сайт** http://www.s-n-p.ru

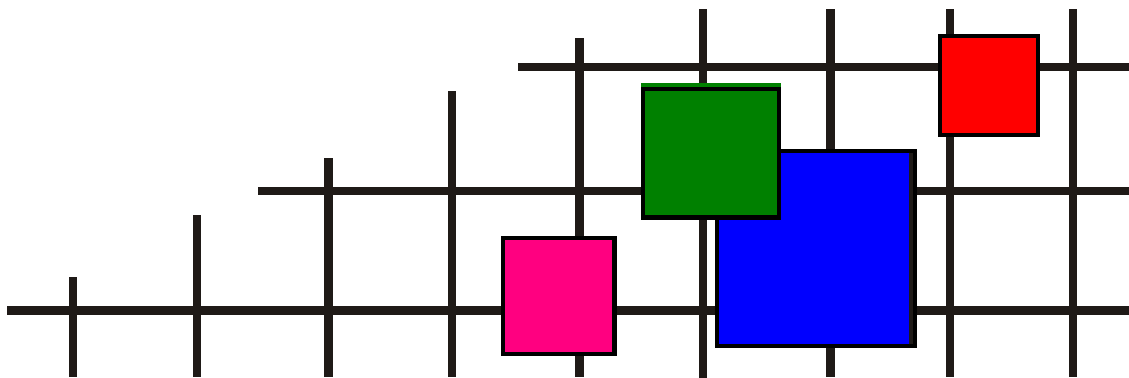


СЕРВИС ВЫСОКОГО КАЧЕСТВА!


# Fastforward



608138 Mastic

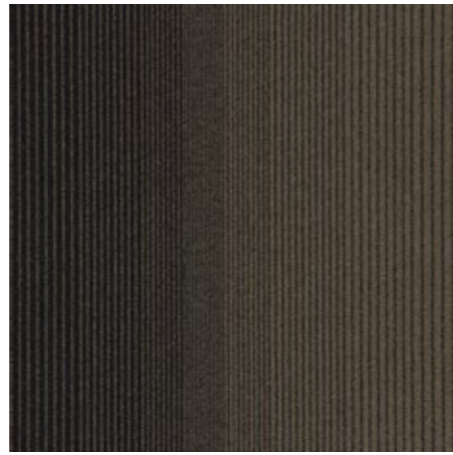


608123 Coffee

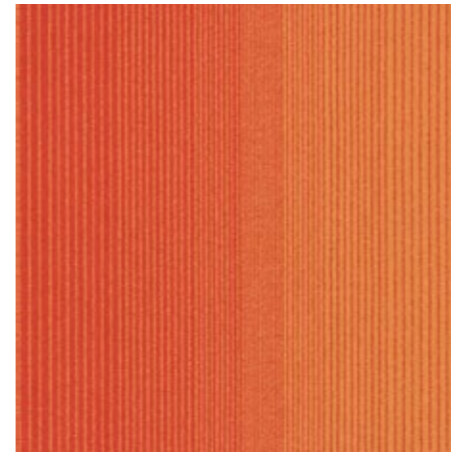


608135 Pumpkin



608136 Plum

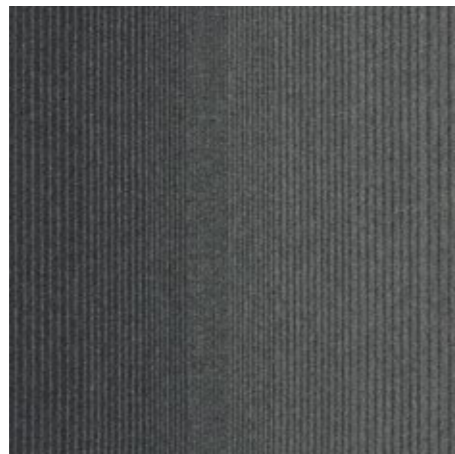

608120 Steel

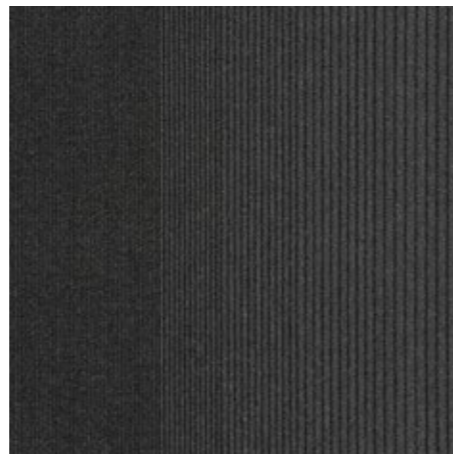

608121 Granite



608134 Vermilion



608137 Wave

Fastforward



608138 Mastic  
608121 Granite  
608120 Steel

Installed: Non Directional

Fastforward



608134 Vermilion

Installed: Brick

Fastforward



608121 Granite  
608136 Plum

Installed: Non Directional


<b>Product Definition</b>	Tufted Plain Level Cut Tile
Konstruktion	Getuftete Veloursqualität
Descripción	Moqueta modular tufting pelo cortado aspecto velour
Description	Dalle de moquette à velours tufté coupé rasé
Type	Getufte velours
Descrizione	Velluto tufted piano

<b>Pile Material</b>	100% BCF Solution Dyed Nylon contains pre-consumer recycled content
Polfasermaterial	100% Polyamid garngefärbt mit recyceltem Anteil (Prä-Konsumenten-Anteil)
Composición Fibra	100% Poliamida BCF tintada en masa con contenido reciclado pre-consumo
Composition	100% Poyamide BCF Teint en masse contenant des éléments recyclés pré-consommation
Poolmateriaal	100% Solution Dyed Polyamide BCF, bevat pre-consumer gerecycled content
Fibra	100% Poliammide BCF tinta in massa con contenuto riciclato pre-consumer


<b>Pile Yarn Weight</b> / Poleinsatzgewicht / Peso Fibra	520g/m <sup>2</sup> ± 10%
/ Poids de fibre / Poolinzetgewicht / Peso Felpa	
<b>Total Weight</b> / Gesamtgewicht / Peso Total	4200g/m <sup>2</sup> ± 5%
Poids total / Totaalgewicht / Peso Totale	
<b>Pile Height</b> / Polschichtdicke / Altura Fibra /	1.7 mm ± 0.3 mm
Hauteur de la fibre / Poolhoogte / Altezza Felpa	
<b>Total Thickness</b> / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	5.4 mm ± 0.3 mm
<b>Gauge/Ends 10 cm</b> / Teilung x 10 cm / Galga x 10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm	5/64 – 50.4
<b>Tufts per m<sup>2</sup></b> / Noppenzahl/m <sup>2</sup> / Puntadas m <sup>2</sup> / Densité du tuft par m <sup>2</sup> / Aantal noppen per m <sup>2</sup> / Densità Punti	206,640 ± 5%
<b>Backing Type</b> / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo	Graphlex®
<b>Wear Classification</b> / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC1

<b>Style</b>	60814
5m <sup>2</sup> - 20 tiles per box (50 x 50 cm ± 0.2%)	
<b>Radiant Panel</b> / Schwerentflammbarkeit	(EN ISO 9239/1)Euroclass Bfl s1 (EN ISO 13501)
<b>Hot Metal Nut</b>	Pass, low radius of effects of ignition (BS 4790)
<b>Dimensional Stability</b> / Dimensionsstabilität / Estabilidad Dimensional / Stabilité dimensionnelle / Dimensioneale stabiliteit / Test Stabilità dimensionale	≤ 0.2% (ISO 2551 / EN 986)


<b>Sound Absorption</b>					
<b>125Hz</b>	<b>250Hz</b>	<b>500Hz</b>	<b>1000Hz</b>	<b>2000Hz</b>	<b>4000Hz</b>
0.01	0.04	0.07	0.17	0.24	0.30




EN 14041  
DOP: 1037/114947  
textile floor covering  
EN 1307




Ashlar Brick Non-Directional




Cert ENP 477



19.6dB ≥ 2.4 ≥ 7 0.15



Bfl-s1 DS <10%T



Interface European Manufacturing BV reserve the right to change or modify specifications.

Die Interface European Manufacturing BV behält sich das Recht vor, Produktspezifikationen zu ändern oder entsprechend anzupassen.

Interface European Manufacturing BV se reserva el derecho a modificar las especificaciones arriba referenciadas.

Interface European Manufacturing BV se réserve la possibilité de modifier les caractéristiques ci-dessus.

Interface European Manufacturing BV behoudt zich het recht voor de specificaties te allen tijde aan te passen.

Interface European Manufacturing BV si riserva il diritto di modificare le proprie specifiche tecniche senza preavviso.

For full environment data, visit:  
[www.interface.com/eds](http://www.interface.com/eds)  
Visit our design blog at:  
[www.designwithpurposeblog.com](http://www.designwithpurposeblog.com)

## Light Value

Product	Colour No	Colour Name	L Value*	Y Value*
<b>Fastforward</b>	608120	Steel	29.0	5.8
	608121	Granite	24.0	4.1
	608123	Coffee	24.0	4.1
	608134	Vermilion	28.7	5.7
	608135	Pumpkin	40.3	11.4
	608136	Plum	30.2	6.3
	608137	Wave	26.2	4.8
	608138	Mastic	64.0	32.8

\* **Light Value:** L Value = L according to CIE L\*a\*b\* colour space, Y Value = Light Reflectance Value according to BS 8493

**Lichtreflexionswerte:** L-Wert = L gemäß CIE L\*a\*b\* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

**Valores de Reflectancia de Luz:** Valor L= L según CIE L\*a\*b\* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

**Valeurs concernant la lumière:** Valeur L = L faisant référence à la méthode CIE L\*a\*b\* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

**Licht waarden:** L Waarde = L volgens CIE L\*a\*b\*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

**Indici di riflettanza alla luce:** Indice L= L secondo CIE L\*a\*b\* colour space, Indice Y= Indice di riflettanza alla luce secondo la norma BS 8493

# Environmental Data Sheet

Construction			
Yarn system	100% BCF Solution Dyed PA 6,6		
Backing system	Graphlex*		
Recycled Content	Total	Pre consumer	Post consumer
Product average	52,29%	52,29%	0,00%
Yarn	21,23%	0,00%	0,00%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint			
Global Warming Potential (kgs CO <sub>2</sub> equivalents/sq meter)			
Raw materials and Production:		8.3 kg CO <sub>2</sub> eq./m <sup>2</sup>	
Delivery and installation:		0.32 kg CO <sub>2</sub> eq./m <sup>2</sup>	
Use (10 years):		2 kg CO <sub>2</sub> eq./m <sup>2</sup>	
End of life (waste to energy):		4.6 kg CO <sub>2</sub> eq./m <sup>2</sup>	
TOTAL (10 years' lifetime):		15.22 kg CO <sub>2</sub> eq./m <sup>2</sup>	
CO <sub>2</sub> compensation	Carbon neutral Cool Carpet* is standard		
Manufacturing			
Location	Scherpenzeel, NL Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
In a typical installation* using the installation method below:			
Non-directional – 1-2% installation waste			
Installation Waste	Ashlar / Brick – 3-5% installation waste		
For reference: 2 metre wide broadloom typically generates 7-10 % installation waste			
* In a rectangular building, installed before walls.			
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life		
	Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles		
	Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GUT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GuT's testing criteria regarding hazardous substances, emissions and odour. GUT PRODIS Certificate no. F531B645		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III Environmental Product Declaration, <a href="#">EPD-IFF-2011711-E</a>		

Recycled content – colour level						
Colourway	Total recycled content	Pre consumer recycled content	Post consumer recycled content	Yarn recycled content	Yarn pre consumer recycled content	Yarn post consumer recycled content
608120 Steel	52,5%	52,5%	0,0%	22,58%	0,00%	0,00%
608121 Granite	52,6%	52,6%	0,0%	24,06%	0,00%	0,00%
608122 Lead	52,6%	52,6%	0,0%	23,76%	0,00%	0,00%
608123 Coffee	51,7%	51,7%	0,0%	16,12%	0,00%	0,00%
608124 Iron	52,4%	52,4%	0,0%	22,48%	0,00%	0,00%
608127 Mink	51,8%	51,8%	0,0%	17,22%	0,00%	0,00%
608130 Copper	52,6%	52,6%	0,0%	23,52%	0,00%	0,00%
608132 Slate	52,2%	52,2%	0,0%	20,14%	0,00%	0,00%
Compliance to Green Building Schemes						
BREEAM (UK and international)	BRE Green Guide Ratings: Office - A rated Education - A rated Health Care - A rated Retail (by fashion) - A+ rated Potential contribution to following categories and credits: Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness Wst 01 - Construction Waste Management					
LEED 2009 US	Potential direct or indirect contribution to following categories and credits: Indoor Environmental Quality Credit 4.1 Low Emitting Materials: Adhesive & Sealants Credit 4.3 Low Emitting Materials: Carpet Systems Materials and Resources Credit 2.1 Construction Waste Management Credit 4.1 Recycled content Credit 5.1 Regional Materials Innovation and Design Credits 1-4 1 Climate Neutral Products Credits 1-4 1 Pilot Credit 43, Certified Products					
HQE (FR)	Potential direct or indirect contribution to several points within following targets: 2. Integrated choice of products and construction materials 3. Low site nuisance 9. Acoustic comfort 10. Visual comfort 11. No unpleasant smells 12. Sanitary quality of areas 13. Sanitary air quality					
DGNB (D)	Potential direct or indirect contribution to following criterion ENVIRONMENTAL QUALITY ENV1.2 Local Environmental Impact ECONOMIC QUALITY ECO1.1 Building-Related Lifecycle Costs ECO2.1 Efficient Use of Space SOCIOCULTURAL AND FUNCTIONAL QUALITY SOC1.2 Indoor Air Quality SOC1.3 Acoustic Comfort TECHNICAL QUALITY TEC1.5 Ease of Cleaning and Maintenance TEC1.6 Ease of Dismantling and Recycling					






## TacTiles™

---

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want

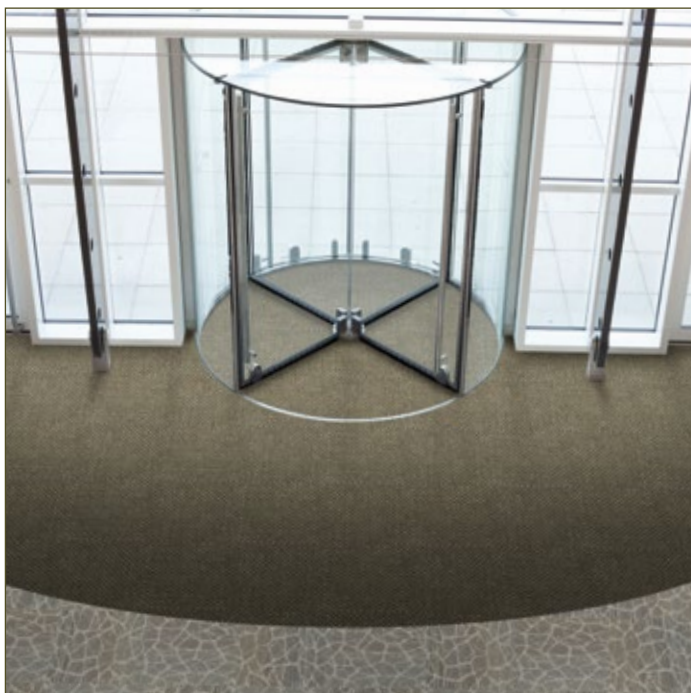

## Entrance Matting

---

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.