



Heavy Contract Carpet and Tiles



Heckmondwike
Quality in every fibre

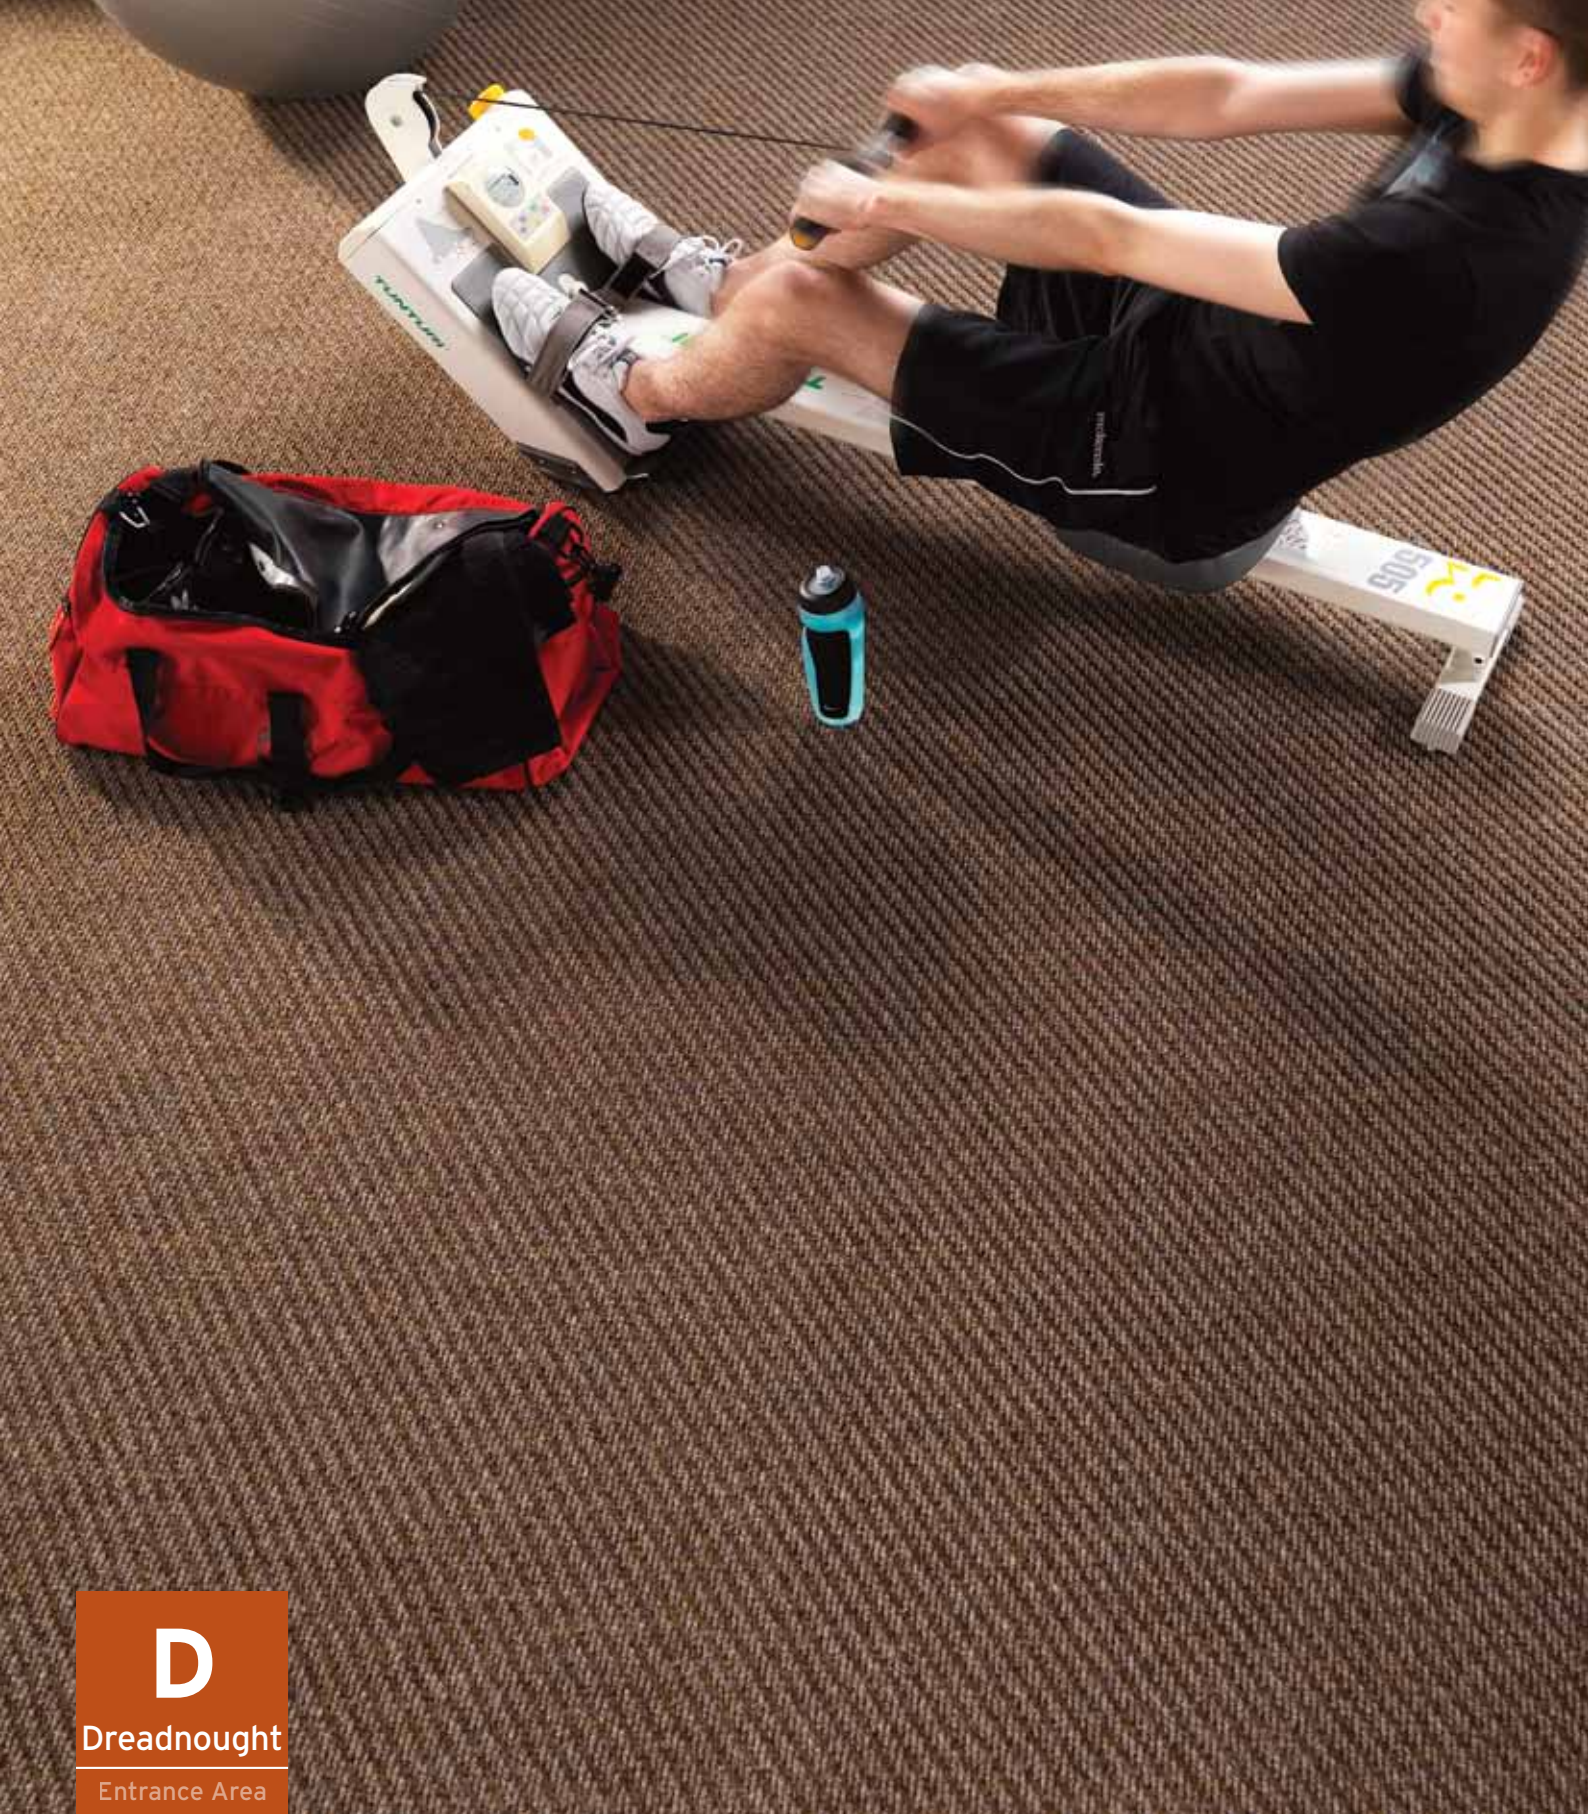

D
Dreadnought
Entrance Area



Anthracite



Ash Grey




Fiesta



Gingerbread




Heath



Lincoln Green



Moorland




Pale Olive


Heckmondwike Dreadnought

Entrance Area



Striking Dreadnought features an attractive diagonal, ribbed surface structure which is popular in schools, colleges and universities. In areas of heavy wear and tear, the high durability meets the performance expectations of heavy footfall.



Pebble



Slate

Specification	Dreadnought	
Fibre Construction (Sheet)	100% Polypropylene	
Fibre Construction (Tile)	100% Polypropylene	
Colour Fastness	Light (BS EN ISO 105:B02) 6 Wet Rubbing (BS EN ISO 105:B01) 4-5 Dry Rubbing (BS EN ISO 105:X12) 4-5	
Flammability	BS6307 Methanamine Pill Test - Pass	
Formats	Sheet 	Tiles 
Backing	Rubber Waffle	Bitumen
Size	2 metre and 4 metre. Ribbing runs down length of roll	50cm x 50cm
Weight	2437gm metre ²	4553gm metre ²
Thickness	11mm	11.50mm



BESA



Manufactured in the UK

E & OE

Heckmondwike FB reserves the right to change or modify product specifications without giving prior notice. Colours are limited to the print process and may differ slightly to the actual product.

05/2012

 **Heckmondwike**
Quality in every fibre

Heckmondwike FB, A division of
National Floorcoverings Ltd.
Wellington Mills, Liversedge,
West Yorkshire WF15 7FH

Sales: 01924 406161 - Admin: 01924 410544

Free Fax: 0800 136769

sales@heckmondwike-fb.co.uk

www.heckmondwike-fb.co.uk