


ковровая плитка • ковровые покрытия • ковры и ковровые дорожки • гобеленовые настенные ковры
безопасный пол • грязезащита • аксессуары для лестниц и пола • системы светодиодной подсветки
низкопрофильная система кабельной проводки • сопутствующие товары

СОВРЕМЕННЫЕ НАПОЛЬНЫЕ ПОКРЫТИЯ (ООО «СНП»)

Телефон +7 (495) 916-94-83


E-mail info@s-n-p.ru

Сайт <http://www.s-n-p.ru>

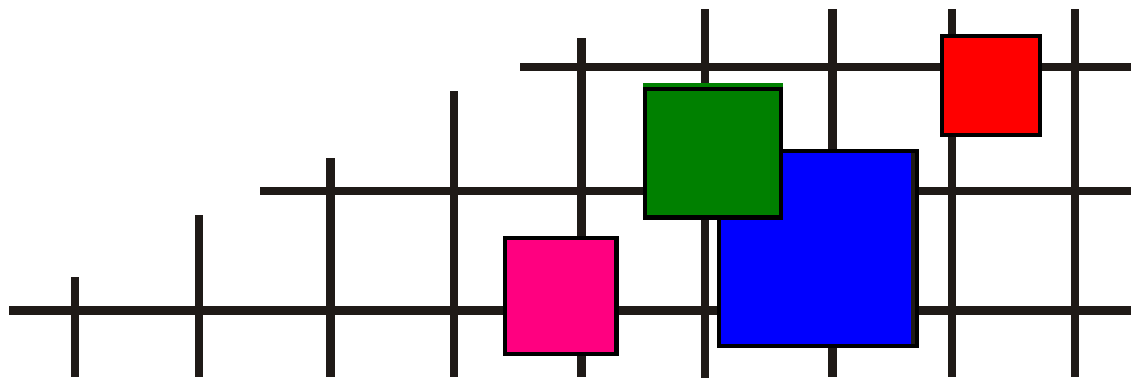


СЕРВИС ВЫСОКОГО КАЧЕСТВА!


Yuton 104

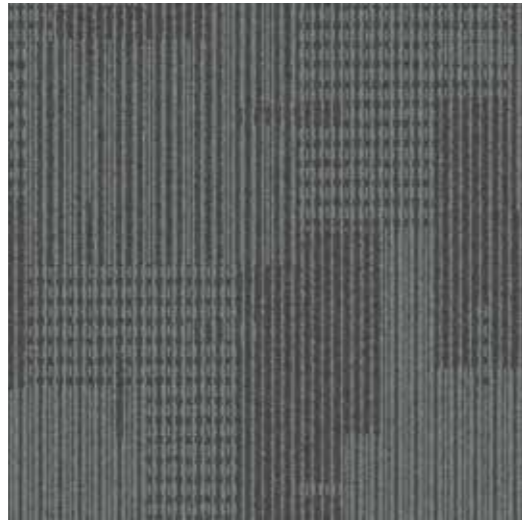


305568 Cloud

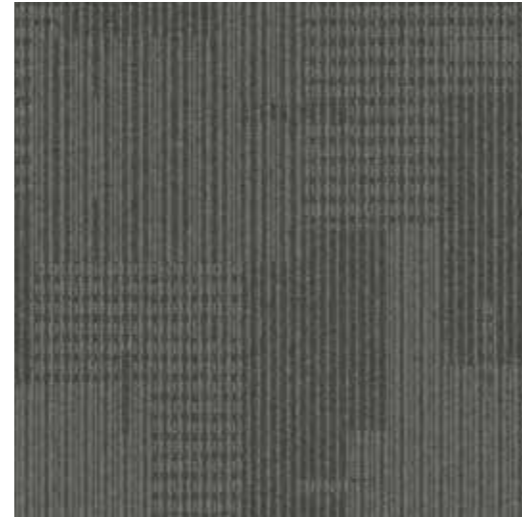

305569 Slate

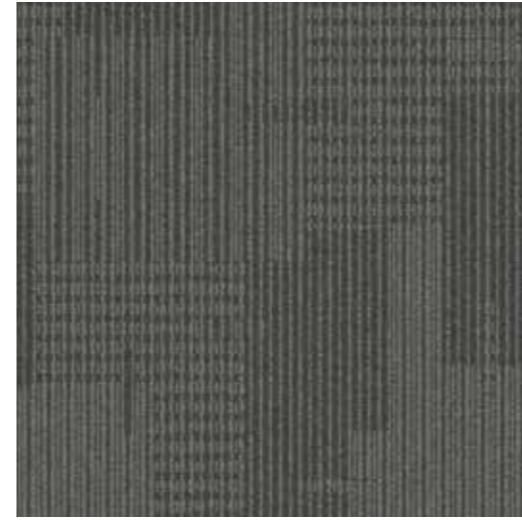

305570 Thunder

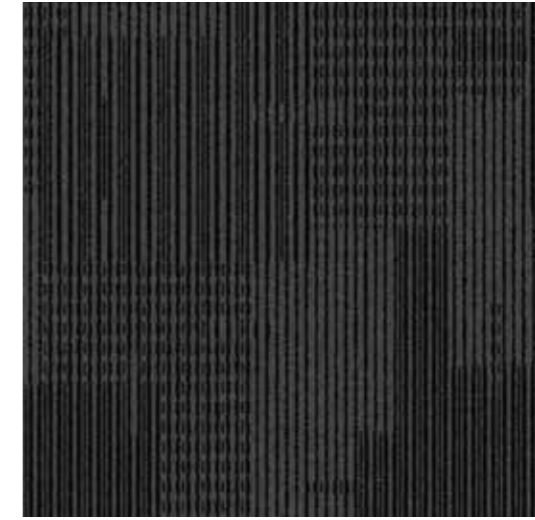

305571 Charcoal




305572 Whirl Pool




305573 Petrol




305574 Ember

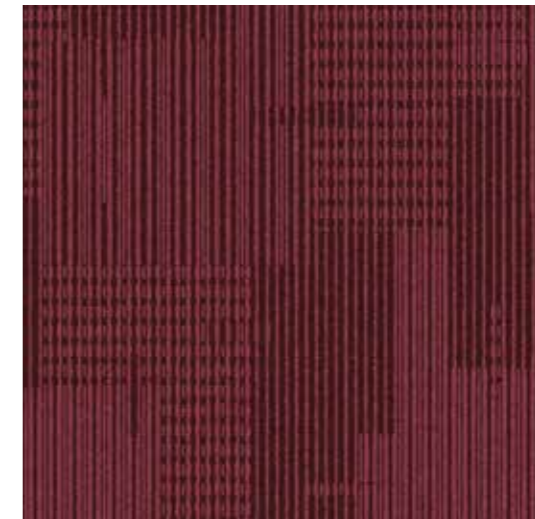


305575 Crimson

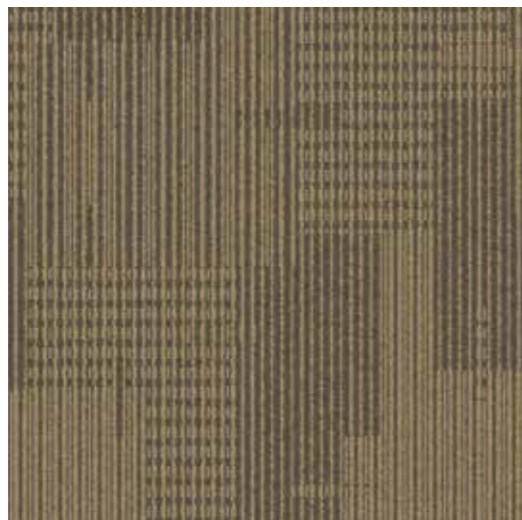

305576 Pasture

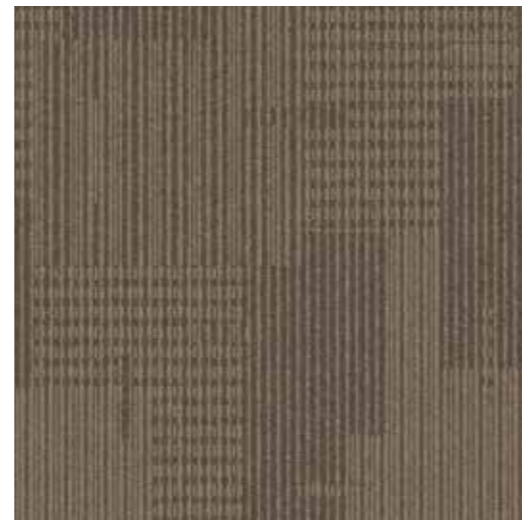

305577 Stone

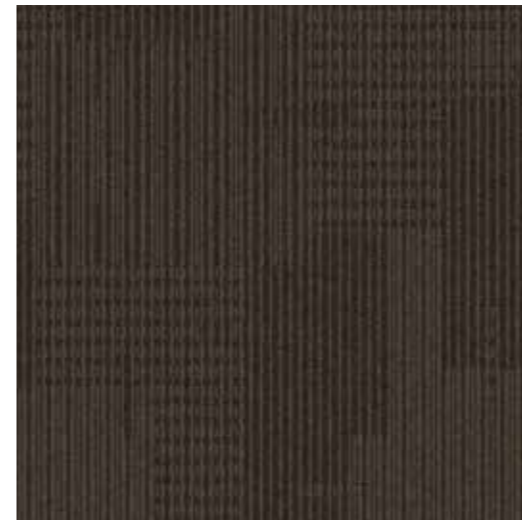

305578 Mink



305579 Fern



305572 Whirl Pool

Installed: Non-Directional

Services



TacTiles™

- A smarter, more sustainable way to install carpet tiles
- No need for liquid adhesives
- Fitting tiles is quick, clean and easy and the process virtually eliminates emissions
- No damage to sub floors, and nothing to stop you lifting or moving the carpet whenever you want



Entrance Matting

Incredibly tough, hard-wearing and practical; indoor entrance matting acts as the first line of defence to any interior by removing almost 100% of dirt, rain and mud before it's walked into your flooring.

Both of the products in our commercial entrance matting range – Barricade and Foyer – are resilient, functional, easy to maintain and stylish. And it's for these reasons that our barrier matting forms an essential part of any maintenance programme needed to keep your floorcovering looking its very best.

Product Definition	Tufted Patterned Structured Loop Tile
Konstruktion	Tuftgemusterte strukturierte Schlingenqualität
Descripción	Moqueta modular tufting bucle estructurado con diseno
Description	Dalle de moquette a velours tufté boucle structure
Type	Getufte gedessineerde gestructureerde boucle
Descrizione	Boucle tufted strutturato


Pile Material	100% Solution Dyed Nylon
Polfasermaterial	100% Polyamid garngefärbt
Composición Fibra	100% Poliamida tintada en masa
Composition	100% Polyamide Teint en masse
Poolmateriaal	100% Solution Dyed Polyamide
Fibra	100% Poliammide tinta in massa

Pile Yarn Weight / Poleinsatzgewicht / Peso Fibra / Poids de fibre / Poolinzetgewicht / Peso Felpa	497g/m ² ± 5%
Total Weight / Gesamtgewicht / Peso Total Poids total / Totaalgewicht / Peso Totale	4344g/m ² ± 5%
Pile Height / Polschichtdicke / Altura Fibra / Hauteur de la fibre / Poolhoogte / Altezza Felpa	2,5 mm ± 0,3 mm
Total Thickness / Gesamtdicke / Espesor Total / Epaisseur totale / Totale dikte / Altezza Totale	6,4 mm ± 0,5 mm
Gauge/Ends 10 cm / Teilung x 10 cm / Galga x 10 cm / Jauge-Rangs par 10 cm / Rijen per 10 cm / Serraggio x 10 cm	1/12 – 47.2
Tufts per m² / Noppenzahl/m ² / Puntadas m ² / Densité du tuft par m ² / Aantal noppen per m ² / Densità Punti	244,800 ± 5%
Backing Type / Rückenkonstruktion / Soporte / Sous-couche / Ruguitvoering / Sottofondo	Graphlex®
Wear Classification / Beanspruchungsklasse / Clasificación al tráfico / Classement Gebruiksintensiteit / Resistenza all'usura	Heavy Contract (EN 1307) Class 33 / LC1

Style	30557
4m ² - 16 tiles per box (50 x 50 cm ± 0,2%)	

Radiant Panel / Schwerentflammbarkeit	(EN ISO 9239/1) Euroclass Bfl s1 (EN ISO 13501)
Hot Metal Nut	Pass, low radius of effects of ignition (BS 4790)
Dimensional Stability / Dimensionsstabilität	≤ 0,2% (ISO 2551 / EN 986)
Estabilidad Dimensional / Stabilité dimensionnelle	
Dimensionele stabiliteit / Test Stabilità dimensionale	

Sound Absorption					
125Hz	250Hz	500Hz	1000Hz	2000Hz	4000Hz
0.01	0.05	0.08	0.22	0.34	0.44

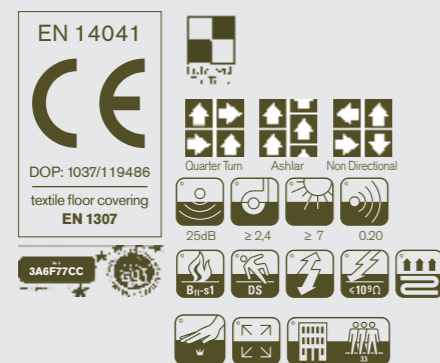

Light Value

Product	Colour No	Colour Name	L Value*	Y Value*
Yuton 104	305568	Cloud	43.40	13.50
	305569	Slate	44.90	14.50
	305570	Thunder	34.60	8.30
	305571	Charcoal	20.80	3.20
	305572	Whirl Pool	30.40	6.40
	305573	Petrol	25.50	4.60
	305574	Ember	21.70	3.40
	305575	Crimson	27.60	5.30
	305576	Pasture	48.50	17.20
	305577	Stone	44.10	13.90
	305578	Mink	31.10	6.70
305579	Fern	33.20	7.60	

* **Light Value:** L Value = L according to CIE L*a*b* colour space, Y Value = Light Reflectance Value according to BS 8493

Lichtreflexionswerte: L-Wert = L gemäß CIE L*a*b* Farbspektrum, Y-Wert = Lichtreflexionswert gemäß British Standard BS 8493

Valores de Reflectancia de Luz: Valor L= L según CIE L*a*b* espacio de color, Valor Y = Valor de reflectancia de luz según el estándar británico BS 8493

Valeurs concernant la lumière: Valeur L = L faisant référence à la méthode CIE L*a*b* pour la couleur, Valeur Y = Valeurs de réflectance de la lumière selon le British Standard BS 8493

Licht waarden: L Waarde = L volgens CIE L*a*b*kleurruimte, Y Waarde = Licht Reflectie Waarde volgens BS 8493

Indici di riflettanza alla luce: Indice L= L secondo CIE L*a*b* colour space, IndiceY= Indice di riflettanza alla luce secondo la norma BS 8493

Environmental Data Sheet

Construction			
Yarn system	100% BCF Solution Dyed PA 6		
Backing system	Graphlex®		
Recycled Content	Total Recycled Content	Pre consumer	Post consumer
Product average	42,61%	42,61%	0,00%
Yarn	0,00%	0,00%	0,00%
Recycled content can be subject to differences between colours. See details for individual colours on next page.			
Carbon Footprint			
Global Warming Potential (kgs CO ₂ equivalents/sq meter)			
Full life-cycle carbon footprint (following our EPD results or EPD calculation method)	Raw materials and Production:	7.33 kg CO ₂ eq./m ²	
	Delivery and installation:	0.65 kg CO ₂ eq./m ²	
	Use (10 years):	2,95 kg CO ₂ eq./m ²	
	End of life (waste to energy):	8 kg CO ₂ eq./m ²	
	TOTAL (10 years' lifetime):	18.93 kg CO ₂ eq./m ²	
CO ₂ compensation	Carbon neutral Cool Carpet® is standard		
Manufacturing			
Location	Scherpenzeel, NL Factory is certified ISO 14001 since 1996 and ISO 9001 since 1990		
Installation Impacts			
TacTiles™	Optimised for glue-free installation with TacTiles™ connectors with virtually zero VOCs		
Installation Waste	In a typical installation* using the installation method below:		
	Quarter turn – 3-4% installation waste		
	Non-directional – 1-2% installation waste		
	Ashlar – 3-5% installation waste		
	For reference: 2 metre wide broadloom typically generates 7-10 % installation waste		
* In a rectangular building, installed before walls.			
End-of-life			
Alternatives to landfill	Reuse: Can be cleaned and reused in a non-critical location to extend its useful life Recycling: Can be returned through the Interface ReEntry scheme and be re-used as raw material in new carpet tiles Waste-to-Energy: Can be incinerated in appropriate waste to energy plant		
Indoor Air Quality			
GuT (Gemeinschaft umweltfreundlicher Teppichboden)	The product passes all requirements of GuT's testing criteria regarding hazardous substances, emissions and odour. Certificate no. 3A6F77CC		
CRI (Carpet & Rug Institute)	Compliant to LEED IQ 4.3 credit (tested in Eurofins to the equivalent test of the CRI Green Label Plus)		
Compliance to Green Building Schemes			
See next page to check how our products contribute to the main green building certification schemes (BREEAM, LEED, HQE and DGNB)			
Type III Environmental Product Declaration			
EPD according to ISO 14025	This product has a type III Environmental Product Declaration, EPD-IFF-20120031-CBD1-EN		

Recycled content – colour level						
Colourway	Total recycled content	Pre consumer recycled content	Post consumer recycled content	Yarn recycled content	Yarn Post consumer recycled content	Yarn Post consumer recycled content
305568 Cloud	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305569 Slate	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305570 Thunder	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305571 Charcoal	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305572 Whirl pool	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305573 Petrol	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305574 Ember	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305575 Crimson	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305576 Pasture	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305577 Stone	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305578 Mink	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%
305579 Fern	42,61%	42,61%	0,00%	0,00%	0,00%	0,00%

Compliance to Green Building Schemes	
BREEAM (UK and international)	BRE Green Guide Ratings: Office - Not available Education - Not available Health Care - Not available Retail (by fashion) - Not available Potential contribution to following categories and credits: Hea 02 - Indoor air quality – minimising sources of air pollution Hea 05 - Acoustic Performance Mat 01 - Life Cycle Impacts Mat 05 - Designing for robustness Wst 01 - Construction Waste Management
LEED 2009 US	Potential direct or indirect contribution to following categories and credits: Indoor Environmental Quality Credit 4.1 Low Emitting Materials: Adhesive & Sealants Credit 4.3 Low Emitting Materials: Carpet Systems Materials and Resources Credit 2.1 Construction Waste Management Credit 4.1 Recycled content Credit 5.1 Regional Materials Innovation and Design Credits 1-4 1 Climate Neutral Products Credits 1-4 1 Pilot Credit 43, Certified Products
HQE (FR)	Potential direct or indirect contribution to several points within following targets: 2. Integrated choice of products and construction materials 3. Low site nuisance 9. Acoustic comfort 10. Visual comfort 11. No unpleasant smells 12. Sanitary quality of areas 13. Sanitary air quality
DGNB (D)	Potential direct or indirect contribution to following criterion ENVIRONMENTAL QUALITY ENV1.2 Local Environmental Impact ECONOMIC QUALITY ECO1.1 Building-Related Lifecycle Costs ECO2.1 Efficient Use of Space SOCIOCULTURAL AND FUNCTIONAL QUALITY SOC1.2 Indoor Air Quality SOC1.3 Acoustic Comfort TECHNICAL QUALITY TEC1.5 Ease of Cleaning and Maintenance TEC1.6 Ease of Dismantling and Recycling

THIS DATA CAN BE USED TO COMPARE CARPET PRODUCTS WITH OTHER PRODUCTS IN YOUR PORTFOLIO. COMPARISON WITH OTHER PRODUCTS WOULD REQUIRE USE OF SAME METHODOLOGIES. Interface reserves the right to modify any information included on the Environmental Data Sheet. Information updated 14th February 2013.